


MAHLE

Driven by performance

SERVICE JACKS

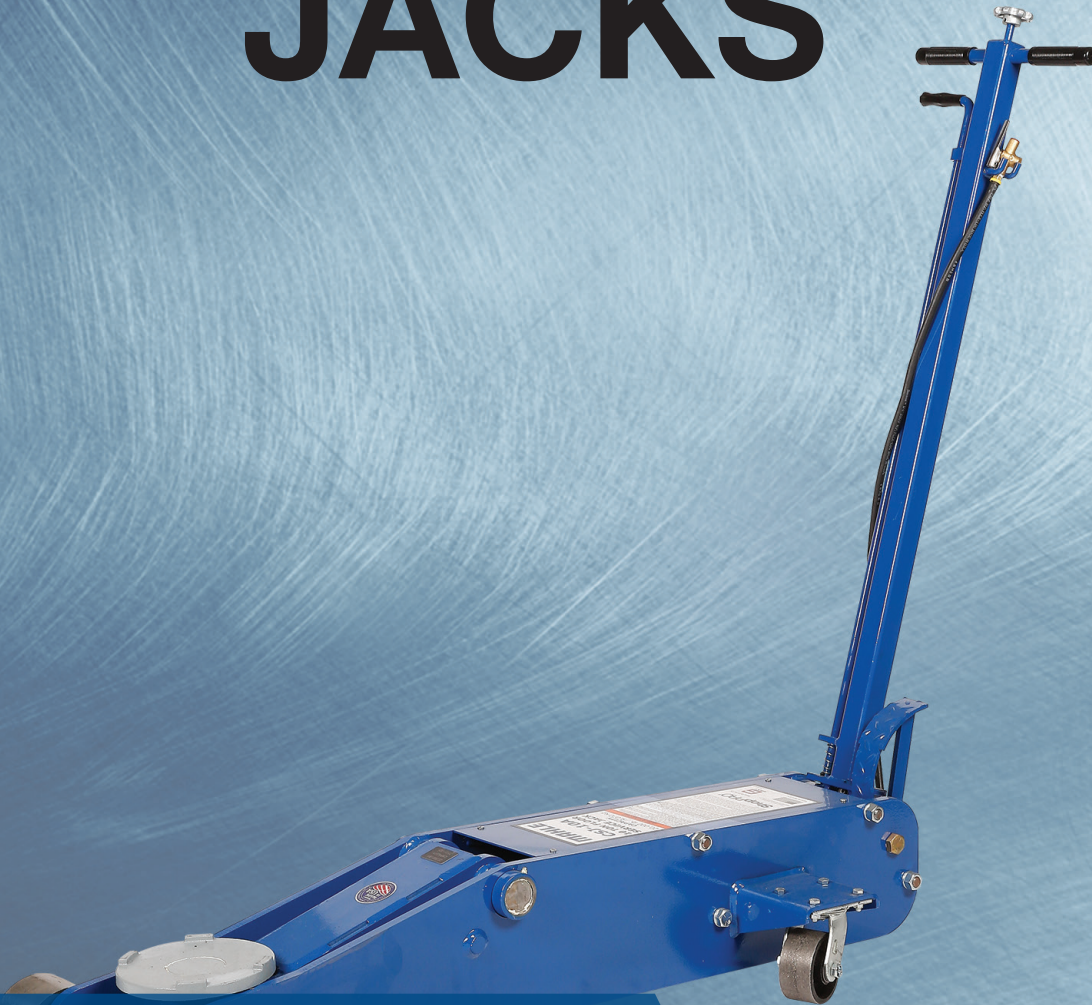

Floor service jacks that set the standard for floor jacks. Models with up to a 20,000 lb. capacity and provide the reliability and quality needed to keep your operation going.

www.servicesolutions.mahle.com

ShopPRO[®]

Service Jacks

American designed and manufactured, our vehicle service jacks offer a low starting height that provides you with the flexibility to accommodate a variety of vehicles.

FEATURES:

- A low start height combined with a high lift height accommodates a variety of vehicles
- Heavy duty steel frame design stands up to the most vigorous shop use
- Manual pump feature included
- Large front wheels and long-life heavy duty rear swivel casters allows ease of portability and durability

- 485 80024 00 CSJ-6A 6 Ton Service Jack – Air Assist**
- 485 80023 00 CSJ-10A 10 Ton Service Jack – Air Assist**
- 485 80022 00 CSJ-3 3 Ton Service Jack***

FEATURE COMPARISON	CSJ-6A	CSJ-10A
Maximum Capacity	12,000 lb (5,443 kg)	20,000 lb (9,072 kg)
Minimum Start Height	4.8 in (12 cm)	7 in (18 cm)
Maximum Lift Height	23.3 in (59 cm)	27 in (69 cm)
Power	Air/Hydraulic/Manual	Air/Hydraulic/Manual
Required Air Pressure	90 to 175 psi (6.2 to 12.1 bar)	90 to 175 psi (6.2 to 12.1 bar)
Chassis Dimensions (H x L)	9.8 in x 48 in (25 cm x 122 cm)	10 in x 53.5 (25 cm x 136 cm)
Handle Length	47.8 in (121 cm)	47 in (119 cm)
Dimensions (W x L)	18.5 in x 95.3 in (47cm x 242 cm)	21.9 in x 101.8 in (56 cm x 259 cm)
Overall Reach	87 in (221 cm)	93 in (236 cm)
Front Caster Diameter	4.3 in (11 cm)	5 in (13 cm)
Rear Swivel Caster Diameter	4 in (10 cm)	4 in (10 cm)
Saddle Diameter	7.4 in (19 cm)	8 in (20 cm)
Front Width Caster to Caster	16.9 in (43 cm)	17.1 in (43 cm)
Rear Width Bracket to Bracket	19.9 in (51 cm)	20.1 in (51 cm)
Shipping Weight	256 lb (116 kg)	410 lb (186 kg)

*Contact your account manager for specification information