


MAHLE

Driven by performance

WHEEL DOLLIES

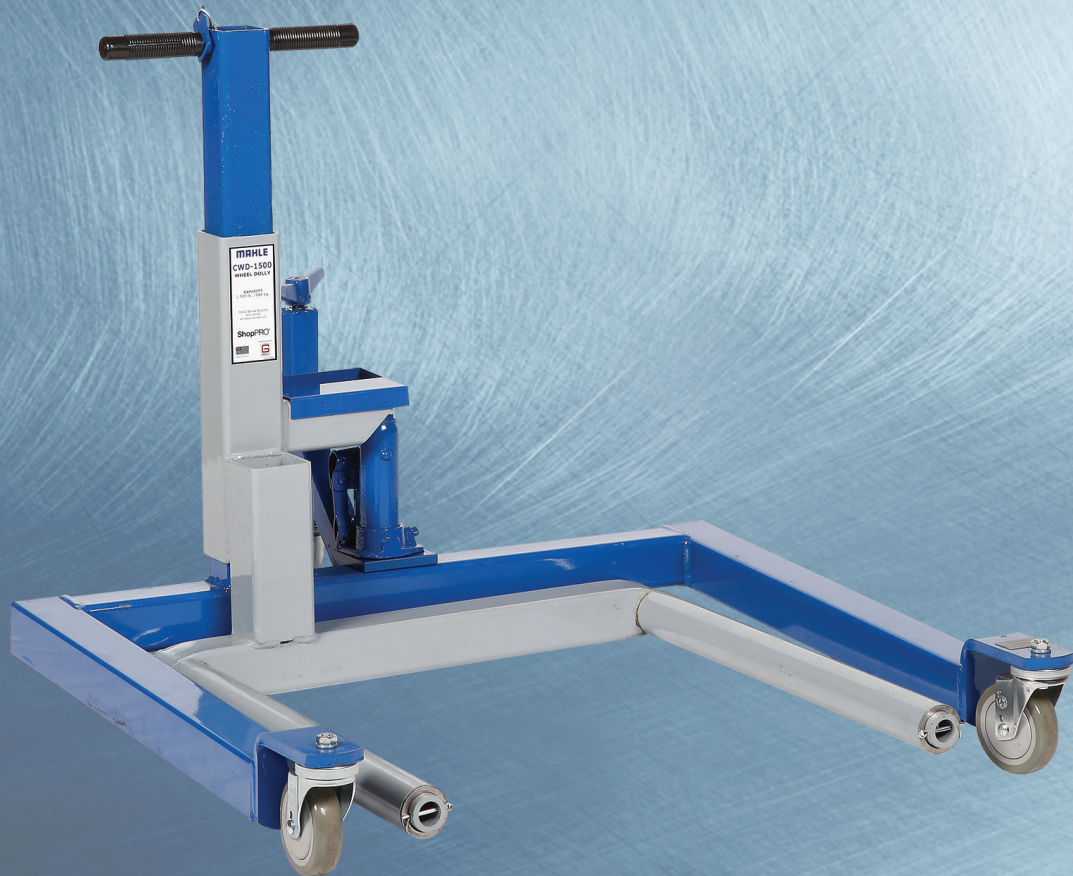

Flexible design capable of handling a variety of truck tire and wheel assemblies.

www.servicesolutions.mahle.com

ShopPRO[®]

Wheel Dollies

The CWD-1500 Wheel Dolly handles super singles and dual wheel assemblies. It handles a wide variety of tire and wheel assemblies to include truck, aircraft, ground support and farm equipment. Internal bearings provide a smooth rotation of the arms for aligning wheel assemblies to hubs with minimal effort and the offset column allows for an open work space, improving productivity. The 3 swivel casters provide great portability when moving wheel assemblies around and the fore and aft tilt make working on un-level surfaces easy.

FEATURES:

- Internal bearing for smooth rotation of the arms
- Offset column for open work space
- Fore and aft tilt



485 80114 00

CWD-1500 1,500 lb. Wheel Dolly

485 80116 00

CWD-1200H 1,200 lb. Wheel Dolly – High Rise

FEATURE COMPARISON

	CWD-1200H	CWD-1500
Capacity	1,200 lb (544 kg)	1,500 lb (680 kg)
Maximum Lift Height	51 in (130 cm)	8 in (20 cm)
Power	Air Assist/Hydraulic	Hydraulic
Lift Arm Speed	24 in (61 cm)	24 in (61 cm)
Tilt (Forward / Rear)	4 in (10 cm)	2 in / 5 in (5 cm / 13 cm)
Side to Side Tilt	±2.78 in (±7 cm)	N/A
Dimensions (H x W x L)	123.4 in x 42.5 in x 52.3 in (313 cm x 108 cm x 133 cm)	30 in x 36 in x 39 in (76 cm x 91 cm x 99 cm)
Chain Length	72 in (183 cm)	72 in (183 cm)
Shipping	455 lb (206 kg)	120 lb (54 kg)

Available Accessories

P/N	DESCRIPTION
485 80115 00	Adapter Arm for CWD-1500
485 80117 00	Commercial Vehicle Tubeless Tire System (CTS-2100)
485 80118 00	Super Single Tool (Long Use) for use with CTS-2100
485 80119 00	Super Single Tool (Sporadic Use) for use with CTS-2100